




Innovating Microwave Backhaul™

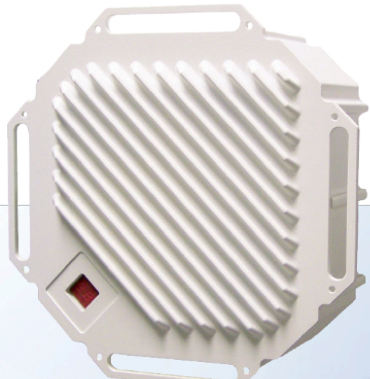

POINT-TO-POINT

# TrangoLINK Giga® 23 GHz Split-Architecture Full Duplex Licensed Microwave IP/TDM Wireless Backhaul System

HIGH-CAPACITY POINT-TO-POINT WIRELESS NETWORK LINK

TrangoLINK Giga® is a high-performance 23 GHz licensed microwave wireless point-to-point system designed for carrier Ethernet, WiMAX/ISP broadband backhaul, mobile network backhaul, private enterprise WAN/LAN extensions, and municipal and public wireless networks.

TrangoLINK Giga® provides a full duplex wireless connection over the air that is ideal for mixed traffic that requires both IP and traditional TDM T1/E1 connectivity.

Each TrangoLINK Giga® consists of two indoor units (IDU) and two outdoor units (ODU). The ODU attaches easily to an external antenna that delivers high link gain and availability.

### Benefits

- » Low cost of ownership
- » Excellent system gain for longer range and higher availability
- » No right-of-way issues, unlike fiber deployment
- » Fast ROI relative to fiber and other traditional options

### Easy Setup and Deployment

- » Minimal maintenance, "set and forget"
- » Split-mount architecture with direct-mount slip-fit ODU and 1U rackmount unit IDU
- » Easy alignment via real-time digital LED RSSI indicators directly on both ODU and IDU
- » Easily upgrade throughput *as you need it*, with no hardware replacements and no forklift upgrades
- » Pay-as-you-grow 2-tier throughput upgrade path

### Highlights

- Up to 620 Mbps (310 Mbps full duplex)
- Extremely low latency, <150 µs (typical)
- Supports FCC, IC, and ETSI channel sizes of 10, 20, 28, 30, 40, 50, and 56 MHz ‡
- Standard 2-year manufacturer warranty

### Performance


- » Highly flexible bandwidth management options
- » Selectable filters for improved sensitivity
- » Flexible modulation for greater spectral efficiency
- » Supports jumbo packets in GigE mode
- » Port Priority assignment (VLAN) and QoS features
- » Four configurable 10/100/1000 BaseT ports for payload
- » Eight T1/E1 ports that are automatically added to or dropped from the data stream when connected or disconnected

### Fail Safe Features for High Reliability

- » Hot standby configuration for protection against equipment failure
- » Supports dual power supplies for power redundancy

### Management

- » Network management through SSH, SNMP, HTTP, and Serial port
- » Built in loop back and far end monitoring

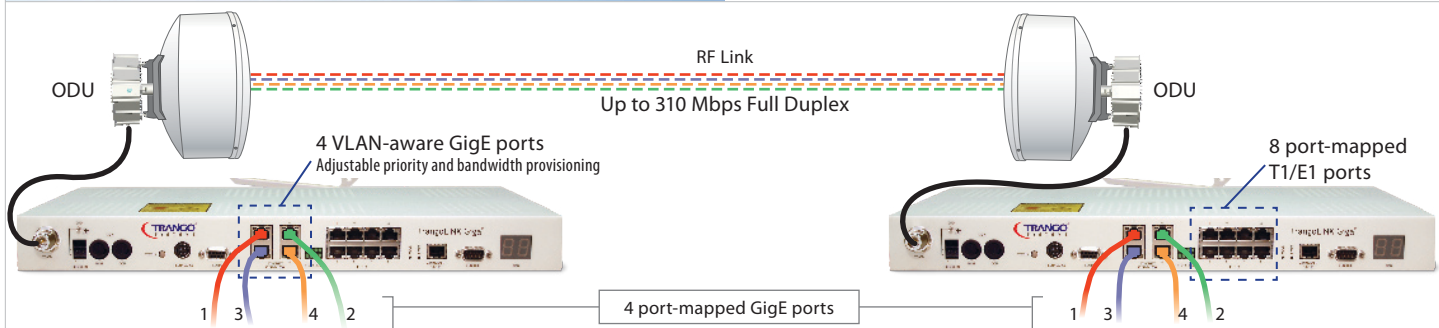

Specifications

**RADIO PARAMETERS**

Frequency of Operation (ODU) †	FCC/IC (1200 MHz duplex spacing)	Band 2A: 21.800 to 22.395 GHz	Band 2B: 23.000 to 23.595 GHz			
	ETSI (1008 MHz duplex spacing)	Band 2A: 22.015 to 22.358 GHz	Band 2B: 23.023 to 23.366 GHz			
Channel Size ‡	10 MHz / 20 MHz / 30 MHz / 40 MHz / 50 MHz / 56 MHz					
RF Power Output (max per modulation)	<b>QPSK</b>	<b>16QAM</b>	<b>32QAM</b>	<b>64QAM</b>	<b>128QAM</b>	<b>256QAM</b>
	+20 dBm	+19 dBm	+18 dBm	+17 dBm	+16 dBm	+15 dBm
Modulation Format	Selectable from QPSK, 16QAM, 32QAM, 64QAM, 128QAM, 256QAM					
Receiver Sensitivity	-61 dBm (256 QAM maximum speed); -87 dBm (QPSK minimum speed)					
Features	ATPC (Automatic Transmit Power Control), Modulation Shifting, Forward Error Correction					
Regulatory Compliance ‡	FCC/ANSI: Part 101, Part 15 Class B Unintentional Radiator      Industry Canada (IC): SRSP-321.8 Issue 2 ETSI: EN 302 217-2-1 V1.2.1 (System Dependent) Class 6A, EN 302 217-2-2 V1.2.2 (Essential Requirements) Class 6A, ITU-R F.637-3					

**DATA**

Data Throughput/ RSSI (1E10 <sup>-6</sup> BER) †	Speeds are uni-directional. For aggregate full duplex speeds, multiply throughput numbers below by 2.						
<b>Legend</b>	<b>Channel Size</b>	<b>QPSK / RSSI</b>	<b>16QAM / RSSI</b>	<b>32QAM / RSSI</b>	<b>64QAM / RSSI</b>	<b>128QAM / RSSI</b>	<b>256QAM / RSSI</b>
Basic Package = 108 Mbps maximum	10 MHz	14 Mbps / -87 dBm	30 Mbps / -80 dBm	34 Mbps / -76 dBm	43 Mbps / -74 dBm	N/A	N/A
License Key 1 = 310 Mbps maximum *	20 MHz	31 Mbps / -86 dBm	66 Mbps / -79 dBm	74 Mbps / -76 dBm	91 Mbps / -73 dBm	108 Mbps / -70 dBm	N/A
	28 / 30 MHz	44 Mbps / -82 dBm	93 Mbps / -75 dBm	105 Mbps / -72 dBm	130 Mbps / -69 dBm	153 Mbps / -66 dBm	165 Mbps / -63 dBm
	40 MHz	64 Mbps / -80 dBm	135 Mbps / -74 dBm	153 Mbps / -70 dBm	188 Mbps / -68 dBm	220 Mbps / -64 dBm	238 Mbps / -62 dBm
	50 MHz	75 Mbps / -80 dBm	160 Mbps / -73 dBm	180 Mbps / -69 dBm	220 Mbps / -67 dBm	260 Mbps / -63 dBm	280 Mbps / -61 dBm
	56 MHz	79 Mbps / -80 dBm	175 Mbps / -73 dBm	198 Mbps / -69 dBm	243 Mbps / -67 dBm	287 Mbps / -63 dBm	310 Mbps / -61 dBm

Packet Size	64-9600 bytes
Flow Control	Yes, via Ethernet pause frames (GigE mode only)
Security	Authentication uses 2 level password
Configuration & Management	SSH, HTTPS, Console (RS232), Ethernet, SNMPV2
Remote firmware update	TFTP client in radio unit

<b>ANTENNA</b>	<b>Model/Description</b>	<b>Gain</b>	<b>3 dB Beamwidth</b>
Antenna options	AD23G-1 / 1-foot antenna with slip-fit mount	35.1 dBi mid-band	2.7°
	AD23G-2 / 2-foot antenna with slip-fit mount	40.2 dBi mid-band	1.7°
	AD23G-3 / 3-foot antenna with slip-fit mount	43.7 dBi mid-band	1.1°
	AD23G-4 / 4-foot antenna with slip-fit mount	46.2 dBi mid-band	0.8°

**POWER**

Input for Indoor Unit (IDU)	-40.5 to -57 VDC
Power Consumption	IDU: < 70 Watts; ODU: < 20 Watts

<b>MECHANICAL &amp; ENVIRONMENTAL</b>	<b>INDOOR UNIT</b>	<b>OUTDOOR UNIT (without antenna)</b>
Enclosure	19-inch rackmount, 1U height	Cast Aluminum
Indicators	2-digit LED RSSI indicator; Ethernet speed and activity for each port; Backup OK indicator; Fault indicator; Power indicator	2-digit LED "in dBm" RSSI indicator for alignment
IF/power/control connection	N-Female	N-Female
Dimensions (height x width x length)	1.75 x 19 x 13 inches	12 x 12 x 6.8 inches
Weight	6 lbs	13.5 lbs
Temperature Range (operational)	14° to 122° F (-10° to +50° C)	-40° to 131° F (-40° to +55° C)
Humidity	95% non condensing	100% condensing
Interfaces	4 GigaEthernet ports RJ45 (10/100/1000BaseT ports) 8 T1/DS1 ports RJ45	N/A
Out of band Management port	1 Ethernet port RJ45	N/A
Alarms	2 inputs – TTL ; 2 outputs – Dry contact closure isolated 50V 1A	N/A
Power connector	4 Pin Terminal Block to support redundant power supplies	N/A
Redundancy (1+1)	4 pin circular	N/A
Console	DB9	N/A
Antenna Connector	N/A	Slip-fit mount / Optional waveguide adapter: WR42 / UBR220
1+1 Protection Coupler	N/A	< -17 dB Return Loss, 3.8 dB Insertion Loss (typical) 20 dB port-to-port Isolation

\* Based on purchasable Option Key. Contact sales for more information.

‡ Legal regulations for specific frequencies vary from region to region—users are responsible for complying with their local regulations.



**Trango Systems, Inc.**

14118 Stowe, Suite B, Poway, CA 92064  
Tel.: +1 (858) 391-0010 | Fax: +1 (858) 391-0020 | Email: sales@trangosys.com

